

## 41-foot Steady Tower CX7103N and CX7103T

### Specifications


	CX7103N	CX7103T
	Non-Rotating	Manual Rotation
Extended Height :	41.4'	41.5'
Retracted Height:	86.1"	87.4"
Max top load :	176 lbs.	176 lbs.
Base tube diameter :	7.87" (200mm)	7.87" (200mm)
Number of sections :	Eleven	Eleven
Max wind speed :	62 mph / 740 in <sup>2</sup>	62 mph / 740 in <sup>2</sup>

Non-Rotating Tower		
Part Number	Description	Price
CX7103NA	Fixed (Non-Rotating)	\$ 12,572
GC.30903	Set of 3 guy collars - fixed on dia 64mm 2.52" (top)	\$ 67
GC.30909	Set of 3 guy collars - fixed on dia 140mm 5.52" (middle)	\$ 67

Manual Rotation Tower		
Part Number	Description	Price
CX7103TA	Manual Rotating Base	\$ 12,990
GC.30803	Set of 3 rings on turnable guy collars on dia 64mm 2.52" (top)	\$ 185
GC.30809	Set of 3 rings on turnable guy collars on dia 140m 5.52" (middle)	\$ 286

Tower Options		
Part Number	Description	Price
RP.30604.T (3)	Guy rope - 65 ft (20 m) at top	\$ 411
RP.30602.T (3)	Guy rope - 32 ft (10 m) at middle	\$ 315
PK.30701 (3)	Standard Picket	\$ 204
HA.31301	5 lb. Hammer	\$ 21
TP.35500	Bags for carrying ropes and pickets	\$ 126
FB.33800	Lookup Light	\$ 310
BK.30107	Lower Mounting Bracket	\$ 79
BK.30058	Square Roof Bracket	\$ 229
BK.30208	Upper Mounting Bracket	\$ 188
MS.32302	Reversed micro-switch	\$ 131

Internal Cable Options	
See Page 58	Cable must be less than 2.2" Diameter

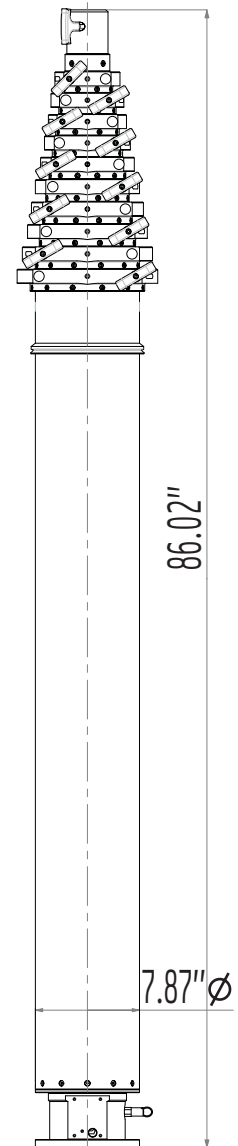

Tower Model CX7103N

## Product Fact

### Ratings and Certifications

The Fireco Components factory in Italy, where all Tempest Fireco Towers are manufactured, is ISO9001 operations & NATO rated. Tempest Fireco Towers received UL certification of NFPA-1901 compliance.