

1300 Series

12-foot Tower, CL3419NZ (priced with 2 x 150W 12V)

Specifications

Extended Height :	12' 10"	\$ 3,339
Retracted Height:	55"	
Max top load :	66 pounds	
Base tube diameter :	3.5" (90mm)	
Number of sections :	Four	
Max wind speed :	60 mph @ 372 sq. in.	

Standard Tower Features

Part Number	Description	Price
TT.31603	Non-Dual Tilt and Turn 12V LIGHT	\$ 2,224
RC.31747	Wireless Remote Control	\$ 429
RC.31746	Wired Remote Control	\$ 1,377
OPA100-H15	Fire Research 2 x 150W 12V Lights	\$ 2,113
MS.32301.MI	Tower Extension Warning Switch	\$ 131
FB.33800	Lookup Light	\$ 310
CODE Z	Cable Z: (9)16ga + (13)24ga	\$ 226
BK.30204	Upper Mounting Bracket	\$ 125
BK.30104	Lower Mounting Bracket	\$ 62

Package List Price: \$10,336

OPTIONAL 2 x 150W 12V Lighting

Part Number	Description	Add
KR-32	Havis Shields Magnafire	\$ 88

OPTIONAL Dual Tilt and Turn


Part Number	Description	Add
TT.31641	DUAL Tilt/Turn 12V STANDARD	\$ 1,533
RC.31748	Wired Remote Control 3 motors	
RC.31749	Wireless Remote Control 3 motors	

OPTIONAL Smart Remote Control

Part Number	Description	Add
RC.31756	SMART Remote Control (non-dual tilt)	\$ 100
RC.31758	SMART Remote Control (dual tilt)	\$ 150

OPTIONAL Mounting Bracket

Part Number	Description	Add
BK.30055	Square Roof Bracket	\$ 50

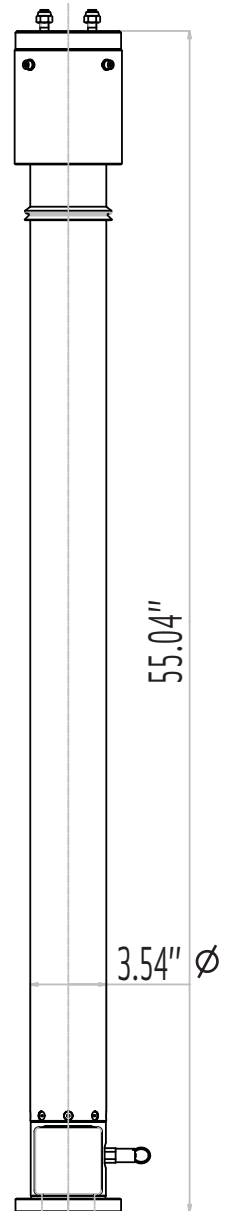

Tower Model CL3419NZ

Pricing Structure

Here's how it works...

Locate the desired Tempest Fireco Tower in this catalog. The package list price is shown under the "Standard Tower Features" data table on each product page. Keep the package as is, or select from the options list below and add those product option prices to the package price.

12-foot Tower, CL3419NZ (priced with 4 x 500W 120V Halogen)

Specifications

Extended Height :	12' 10"	\$ 3,339
Retracted Height:	55"	
Max top load :	66 pounds	
Base tube diameter :	3.5" (90mm)	
Number of sections :	Four	
Max wind speed :	60 mph @ 372 sq. in.	

Standard Tower Features

Part Number	Description	Price
TT.31603	Non-Dual Tilt and Turn 12V LIGHT	\$ 2,224
RC.31747	Wireless Remote Control	\$ 429
RC.31746	Wired Remote Control	\$ 1,377
MS.32301.MI	Tower Extension Warning Switch	\$ 131
FD.34105.T/110	FIRECO 4 x 500W 120V Halogen Lights	\$ 513
FB.33800	Lookup Light	\$ 310
CODE Z	Cable Z: (9)16ga + (13)24ga	\$ 226
BK.30204	Upper Mounting Bracket	\$ 125
BK.30104	Lower Mounting Bracket	\$ 62

Package List Price: \$8,736

OPTIONAL 4 x 500W 120V Lighting

Part Number	Description	Add
OPA100-S50 (4)	Fire Research Optimum	\$ 1,202
KR-55-WB (4)	Havis Shields Magnafire	\$ 1,010

OPTIONAL Dual Tilt and Turn


Part Number	Description	Add
TT.31641	DUAL Tilt/Turn 12V STANDARD	\$ 1,533
RC.31748	Wired Remote Control 3 motors	
RC.31749	Wireless Remote Control 3 motors	

OPTIONAL Smart Remote Control

Part Number	Description	Add
RC.31756	SMART Remote Control (non-dual tilt)	\$ 100
RC.31758	SMART Remote Control (dual tilt)	\$ 150

OPTIONAL Mounting Bracket

Part Number	Description	Add
BK.30055	Square Roof Bracket	\$ 50

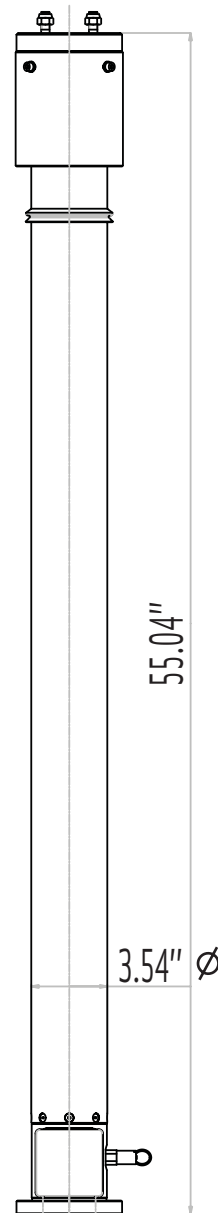

Tower Model CL3419NZ

We're Here to Assist!

Customer Service Hours

Contact a Tempest Fireco Towers Customer Service Representative or Sales Team member for assistance with quotes and specifications. Customer Service is available Monday through Friday, 7am-5pm, PST.

1300 Series

12-foot Tower, CL3419NZ (priced with 4 x 750W 120V Halogen)

Specifications

Extended Height :	12' 10"	\$ 3,339
Retracted Height:	55"	
Max top load :	66 pounds	
Base tube diameter :	3.5" (90mm)	
Number of sections :	Four	
Max wind speed :	60 mph @ 372 sq. in.	

Standard Tower Features

Part Number	Description	Price
TT.31621	Non-Dual Tilt and Turn 12V STANDARD	\$ 2,690
RC.31747	Wireless Remote Control	\$ 429
RC.31746	Wired Remote Control	\$ 1,377
MS.32301.MI	Tower Extension Warning Switch	\$ 131
FD.34125/750.110.T	FIRECO 4 x 750W 120V Halogen Lights	\$ 874
FB.33800	Lookup Light	\$ 310
CODE Z	Cable Z: (9)16ga + (13)24ga	\$ 226
BK.30204	Upper Mounting Bracket	\$ 125
BK.30104	Lower Mounting Bracket	\$ 62

Package List Price: \$9,563

OPTIONAL 4 x 750W 120V Lighting

Part Number	Description	Add
OPA100-S75 (4)	Fire Research Optimum	\$ 841
KR-36-WB (4)	Havis Shields Magnafire	\$ 692

OPTIONAL Dual Tilt and Turn


Part Number	Description	Add
TT.31641	DUAL Tilt/Turn 12V STANDARD	\$ 1,067
RC.31748	Wired Remote Control 3 motors	
RC.31749	Wireless Remote Control 3 motors	

OPTIONAL Smart Remote Control

Part Number	Description	Add
RC.31756	SMART Remote Control (non-dual tilt)	\$ 100
RC.31758	SMART Remote Control (dual tilt)	\$ 150

OPTIONAL Mounting Bracket

Part Number	Description	Add
BK.30055	Square Roof Bracket	\$ 50

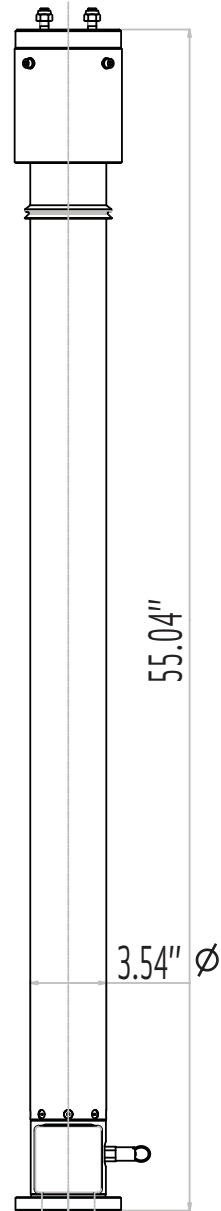


Tower Model CL3419NZ


Featured Mounting Brackets



Standard BK.30204



Standard BK.30104



Optional BK.30055

12-foot Tower, CL3419NZ (priced with 4 x 900W 240V Halogen)

Specifications

Extended Height :	12' 10"	\$ 3,339
Retracted Height:	55"	
Max top load :	66 pounds	
Base tube diameter :	3.5" (90mm)	
Number of sections :	Four	
Max wind speed :	60 mph @ 372 sq. in.	

Standard Tower Features

Part Number	Description	Price
TT.31621	Non-Dual Tilt and Turn 12V STANDARD	\$ 2,690
RC.31747	Wireless Remote Control	\$ 429
RC.31746	Wired Remote Control	\$ 1,377
KR-31-WB (4)	Havis Shields 4 x 900W 240V Halogen Lights	\$ 1,815
MS.32301.MI	Tower Extension Warning Switch	\$ 131
FB.33800	Lookup Light	\$ 310
CODE Z	Cable Z: (9)16ga + (13)24ga	\$ 226
BK.30204	Upper Mounting Bracket	\$ 125
BK.30104	Lower Mounting Bracket	\$ 62

Package List Price: \$10,504

OPTIONAL 4 x 900W 240V Lighting

Part Number	Description	Add
OPA100-R90 (4)	Fire Research Optimum	\$ 254

OPTIONAL Dual Tilt and Turn


Part Number	Description	Add
TT.31641	DUAL Tilt/Turn 12V STANDARD	\$ 1,067
RC.31748	Wired Remote Control 3 motors	
RC.31749	Wireless Remote Control 3 motors	

OPTIONAL Smart Remote Control

Part Number	Description	Add
RC.31756	SMART Remote Control (non-dual tilt)	\$ 100
RC.31758	SMART Remote Control (dual tilt)	\$ 150

OPTIONAL Mounting Bracket

Part Number	Description	Add
BK.30055	Square Roof Bracket	\$ 50

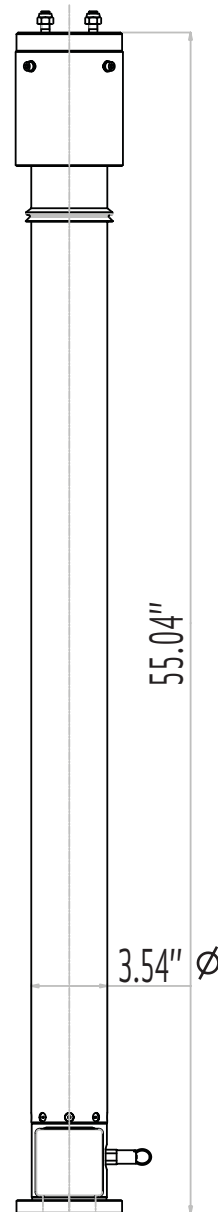

Tower Model CL3419NZ

Product Fact

Low Maintenance

Tower requires no routine lubrication. All internal lubrication is performed during assembly.

1300 Series

12-foot Tower, CL3419NZ (priced with 2 x 1500W 240V Halogen)

Specifications

Extended Height :	12' 10"	\$ 3,339
Retracted Height:	55"	
Max top load :	66 pounds	
Base tube diameter :	3.5" (90mm)	
Number of sections :	Four	
Max wind speed :	60 mph @ 372 sq. in.	

Standard Tower Features

Part Number	Description	Price
TT.31603	Non-Dual Tilt and Turn 12V LIGHT	\$ 2,224
RC.31747	Wireless Remote Control	\$ 429
RC.31746	Wired Remote Control	\$ 1,377
MS.32301.MI	Tower Extension Warning Switch	\$ 131
FD.34154.TO	FIRECO 2 x 1500W 240V Halogen Omega Lights	\$ 475
FB.33800	Lookup Light	\$ 310
CODE Z	Cable Z: (9)16ga + (13)24ga	\$ 226
BK.30204	Upper Mounting Bracket	\$ 125
BK.30104	Lower Mounting Bracket	\$ 62

Package List Price: \$8,698

OPTIONAL 2 x 1500W 240V Lighting

Part Number	Description	Add
OPA100-M15 (2)	Fire Research Optimum	\$ 643

OPTIONAL Dual Tilt and Turn


Part Number	Description	Add
TT.31641	DUAL Tilt/Turn 12V STANDARD	\$ 1,533
RC.31748	Wired Remote Control 3 motors	
RC.31749	Wireless Remote Control 3 motors	

OPTIONAL Smart Remote Control

Part Number	Description	Add
RC.31756	SMART Remote Control (non-dual tilt)	\$ 100
RC.31758	SMART Remote Control (dual tilt)	\$ 150

OPTIONAL Mounting Bracket

Part Number	Description	Add
BK.30055	Square Roof Bracket	\$ 50

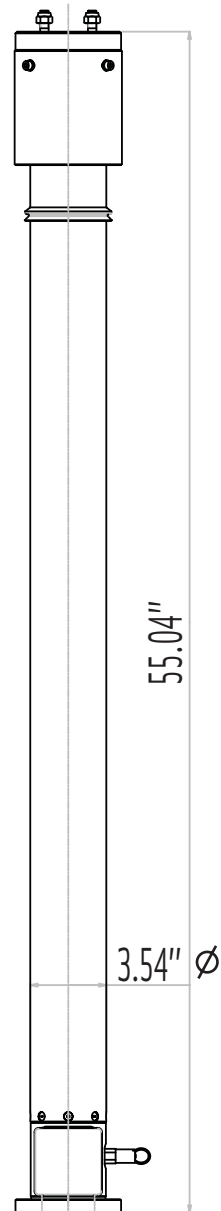

Tower Model CL3419NZ

Pricing Structure

Here's how it works...

Locate the desired Tempest Fireco Tower in this catalog. The package list price is shown under the "Standard Tower Features" data table on each product page. Keep the package as is, or select from the options list below and add those product option prices to the package price.

12-foot Steady Tower CL6419N and CL6419T

Specifications


	CL6419N	CL6419T
	Non-Rotating	Manual Rotation
Extended Height :	13.1'	13.2'
Retracted Height:	58.3"	59.7"
Max top load :	55 pounds	55 pounds
Base tube diameter :	3.5" (90mm)	3.5" (90mm)
Number of sections :	Four	Four
Max wind speed :	75 mph / 372 in ²	75 mph / 372 in ²

Non-Rotating Tower		
Part Number	Description	Price
CL6419NA	Fixed (Non-Rotating)	\$ 3,764
GC.30901	Set of 3 guy collars - fixed on dia 51mm - 2"	\$ 67

Manual Rotation Tower		
Part Number	Description	Price
CL6419TA	Manual Rotating Base	\$ 4,016
GC.30802	Set of 3 rings on turnable guy collars on dia 51mm 2"	\$ 156

Tower Options		
Part Number	Description	Price
RP.30602.T (3)	Guy ropes - 32 ft (10 m)	\$ 315
PK.30701 (3)	Standard Pickets	\$ 204
HA.31301	5 lb. Hammer	\$ 21
TP.35500	Bag for carrying ropes and pickets	\$ 126
FB.33800	Lookup Light	\$ 310
BK.30104	Lower Mounting Bracket	\$ 62
BK.30055	Square Roof Bracket	\$ 199
BK.30204	Upper Mounting Bracket	\$ 125
MS.32302	Reversed micro-switch	\$ 131

Internal Cable Options	
See Page 58	Cable must be less than 1.7" Diameter

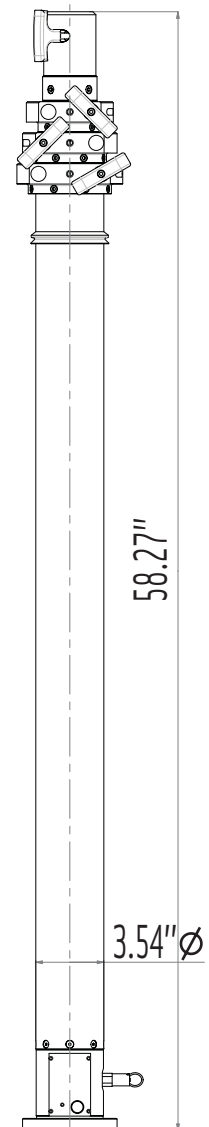

Tower Model CL6419N

Lights, Cameras, and Communications

We're an OEM

Tempest Fireco Towers is an OEM for all major lighting manufacturers as well as many camera and communication manufacturers. Choose from popular brand names such as Havis-Shields, Fire Research Corporation, Tele-Lite, and Intec or R-Vision cameras, and also from our own Fireco brand of quality lighting products.