

19-foot Tower, CS3520NZ (priced with 4 x 1500W 240V Halogen)

Specifications

Extended Height :	19' 7"	\$ 4,063
Retracted Height:	68"	
Max top load :	99 lbs.	
Base tube diameter :	4.53" (115mm)	
Number of sections :	Five	
Max wind speed :	74 mph @ 740 sq. in.	

Standard Tower Features

Part Number	Description	Price
TT.31621	Non-Dual Tilt and Turn 12V STANDARD	\$ 2,690
RC.31747	Wireless Remote Control	\$ 429
RC.31746	Wired Remote Control	\$ 1,377
MS.32301.MI	Tower Extension Warning Switch	\$ 131
FD.34156.T	FIRECO 4 x 1500W 240V Halogen Lights	\$ 834
FB.33800	Lookup Light	\$ 310
CODE Z	Cable Z: (9)16ga + (13)24ga	\$ 226
BK.30206	Upper Mounting Bracket	\$ 131
BK.30106	Lower Mounting Bracket	\$ 70

Package List Price: \$10,261

OPTIONAL 4 x 1500W 240V Lighting

Part Number	Description	Add
OPA100-M15 (4)	Fire Research Optimum	\$ 1,235

OPTIONAL Dual Tilt and Turn


Part Number	Description	Add
TT.31641	DUAL Tilt/Turn 12V STANDARD	\$ 1,067
RC.31748	Wired Remote Control 3 motors	
RC.31749	Wireless Remote Control 3 motors	

OPTIONAL Smart Remote Control

Part Number	Description	Add
RC.31756	SMART Remote Control (non-dual tilt)	\$ 100
RC.31758	SMART Remote Control (dual tilt)	\$ 150

OPTIONAL Mounting Bracket

Part Number	Description	Add
BK.30056	Square Roof Bracket	\$ 50

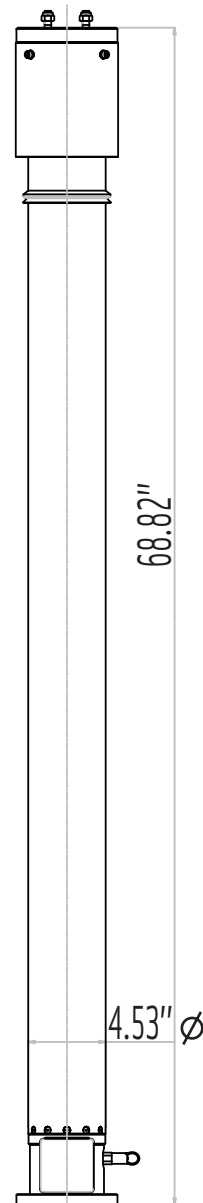

Tower Model CS3520NZ

Product Fact

Protection Covers

Tempest Fireco Towers feature an upper tubular protection cover that keeps dust and water away from the seal rings when tower is in the retracted position.