

1300 Series

12-foot Tower, CL3419NZ (priced with 4 x 750W 120V Halogen)

Specifications

Extended Height :	12' 10"	\$ 3,339
Retracted Height:	55"	
Max top load :	66 pounds	
Base tube diameter :	3.5" (90mm)	
Number of sections :	Four	
Max wind speed :	60 mph @ 372 sq. in.	

Standard Tower Features

Part Number	Description	Price
TT.31621	Non-Dual Tilt and Turn 12V STANDARD	\$ 2,690
RC.31747	Wireless Remote Control	\$ 429
RC.31746	Wired Remote Control	\$ 1,377
MS.32301.MI	Tower Extension Warning Switch	\$ 131
FD.34125/750.110.T	FIRECO 4 x 750W 120V Halogen Lights	\$ 874
FB.33800	Lookup Light	\$ 310
CODE Z	Cable Z: (9)16ga + (13)24ga	\$ 226
BK.30204	Upper Mounting Bracket	\$ 125
BK.30104	Lower Mounting Bracket	\$ 62

Package List Price: \$9,563

OPTIONAL 4 x 750W 120V Lighting

Part Number	Description	Add
OPA100-S75 (4)	Fire Research Optimum	\$ 841
KR-36-WB (4)	Havis Shields Magnafire	\$ 692

OPTIONAL Dual Tilt and Turn


Part Number	Description	Add
TT.31641	DUAL Tilt/Turn 12V STANDARD	\$ 1,067
RC.31748	Wired Remote Control 3 motors	
RC.31749	Wireless Remote Control 3 motors	

OPTIONAL Smart Remote Control

Part Number	Description	Add
RC.31756	SMART Remote Control (non-dual tilt)	\$ 100
RC.31758	SMART Remote Control (dual tilt)	\$ 150

OPTIONAL Mounting Bracket

Part Number	Description	Add
BK.30055	Square Roof Bracket	\$ 50

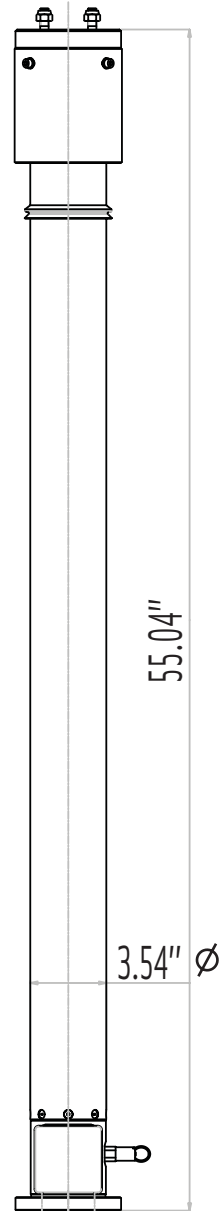


Tower Model CL3419NZ


Featured Mounting Brackets



Standard BK.30204



Standard BK.30104



Optional BK.30055